


Gauges

Analog & Digital



ASME B40.1
GRADE B

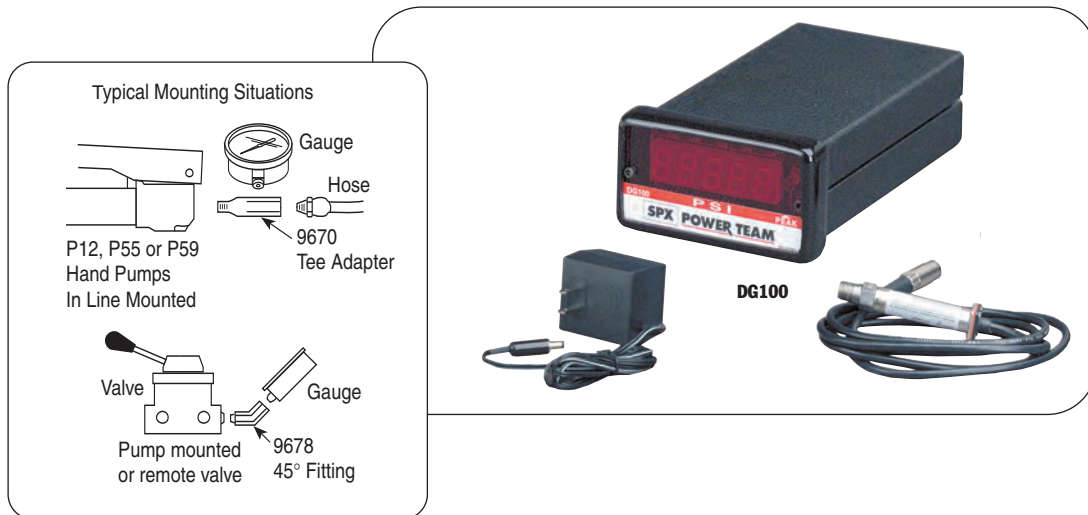

Heavy-duty Hydraulic Pressure Gauges

- Gauges feature an easily readable and highly visible, red day-glo needle.
- High strength steel bourdon tube ensures high cycle life.
- Stainless steel cases and lens locking rings.
- 4" and 6" dry gauges can be filled with silicone (Kit #9046).
- Have 1/4" NPT connections.

Digital Pressure Gauges

- Accurate to within 1%.
 - Larger display characters than ordinary digital gauges.
 - Long-life pressure transducer.
 - 1/4" NPTF male threads for the pressure connection.
 - 6-foot signal input cable connects to back of display unit.
- FEATURES**
- Pressure values are displayed on large red LEDs in 10 psi or bar increments.
 - "Peak" hold feature with reset toggle switch and "Peak On" indicator; Hi/Low set point feature with relay outputs for Hi/Low

alarms and/or control signals.

- A slow flashing display indicates pressure below the low limit; fast blinking display alerts if limit is exceeded.
- High and low limit relays are rated to 5 amps at 115 volts.
- Operating temperature of 0-140°F for the electronic display and -20 to 180°F for the transducer. Gauge housings are extruded aluminum 1/8" DIN enclosures (NEMA 1 rating).
- When power cable is connected to gauge, display will scroll all characters, performing a self-diagnostic routine.